

**HDMI™**

Monitors

42" LCD HD Monitor

ZM-L42A-HD

Features:

- 1920 x 1080 (1080p) Resolution
- BNC, VGA, HDMI and DVI
- 3D Combfilter / Deinterlace
- Built-in Speakers
- Image Rotation Feature Prevents "Burn-In"
- UL, CE and FCC compliant

ZM-L42A-HD

42" LCD HD Monitor


■ Specifications

	Model	ZM-L42A-HD
Video	Screen Size	42"
	Resolution	1920 X 1080 @60Hz
	Contrast Ratio	4000:1
	Brightness	400cd/m2
	Aspect Ratio	16:9
	Color Depth	16.7M
	Viewing Angle (H/V)	178°/178°
	Pixel Pitch	0.4845mm x 0.4845mm
	Response Time	< 6.5ms
	Scanning Frequency	Vertical: 56 ~ 75Hz Horizontal: 31 ~ 80kHz
	Video System	NTSC/PAL
Interface	AV(Composite) In/ Out	1/1
	RGB In (15-pin)	1
	S-Video In/Out	1
	Component (Y, Pb, Pr, Sound L/R) In	2/2
	AV (Composite) Sound In/Out (RCA Type)	1
	DVI/HDMI In	1/1
	Trigger in	1
Audio	PC stereo In/out	1/1
Special Features	Built in speaker	2W x 2
	Filter Type	3D Combfilter/Deinterlace
	Multi Display Function	PIP / PBP / VOV
	Trigger Sensor / Image Rotation	Yes /Yes
	Video Resolution (Max)	600TVL
	OSD Language	English, Spanish, French, German, Italian, Portuguese, Dutch
Additional	VESA Mount	(130mm x 130mm) x 634mm
	MTFB (Approx.)	50,000 Hours
	Remote Control	Transmitter included
	Cabinet	Black finish
	Dimensions (W x H x D)	41.9" x 25.8" x 4.7"
	Weight	68.3 lbs (31kg)
	Power Consumption	200W
	Power Source	100~240 VAC
	Operating Temperature	32 - 104° F / 0 - 40° C
	Certifications	UL, CB, FCC, CE
Compatible Mounts	Call for more information on wall and ceiling mounts	


All specifications are subject to change without notice.

ZM-L42A-HD

42" LCD HD Monitor

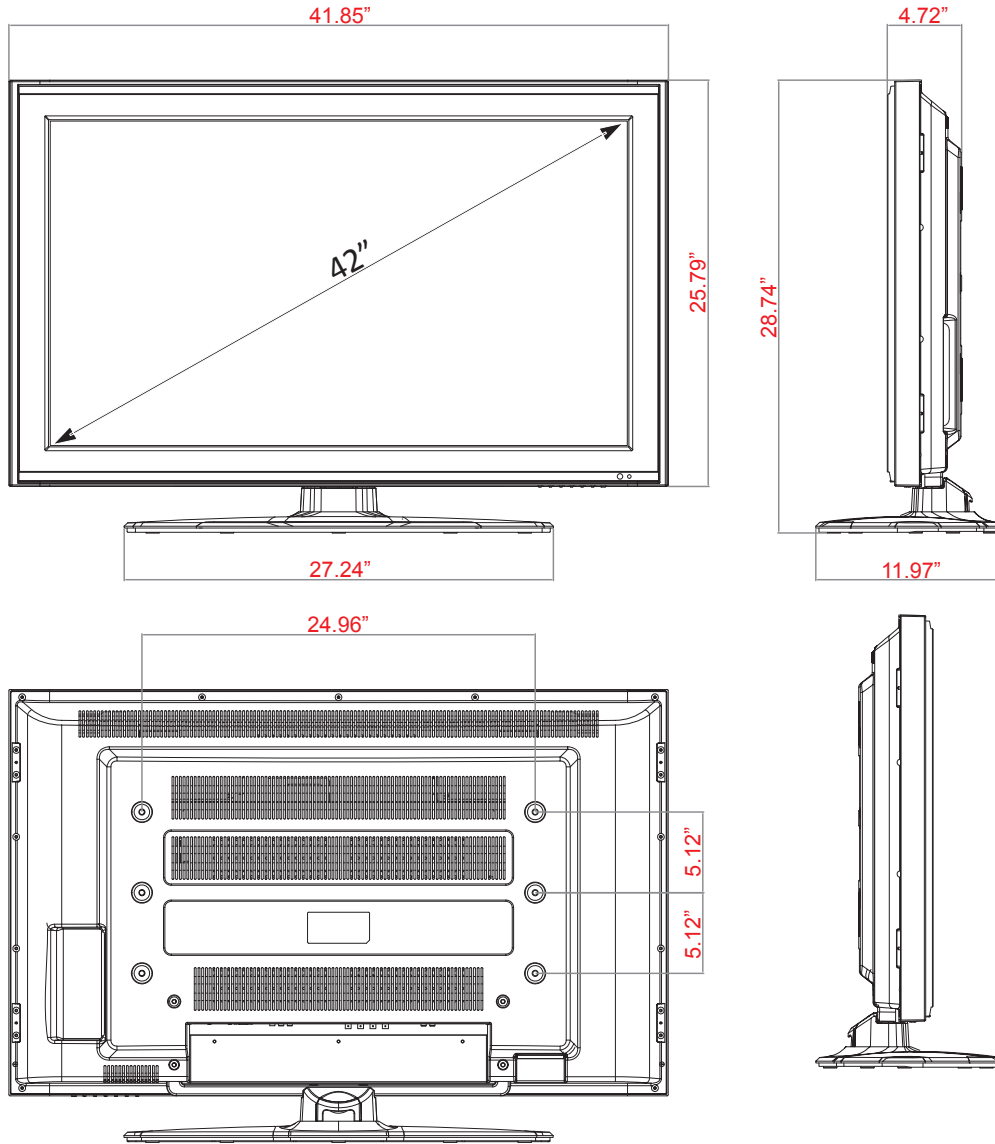

INTERFACE



- ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓
- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- | | |
|-------------------------------|---------------------|
| 1. AC110V IN | 7. COMPONENT |
| 2. AV(composite) SOUND IN/OUT | 8. PC STEREO IN/OUT |
| 3. S-VIDEO IN/OUT | 9. VGA |
| 4. AV(composite)2 IN/OUT | 10. DVI |
| 5. AV(composite)1 IN/OUT | 11. HDMI |
| 6. TRIGGER IN | |