

# CWP05 Wall Pack

80W / 100W / 120W | 3CCT | 120-347V



Meet the successor to our best-selling CWP04 Wall Packs!  
 Ideal for entryway and exterior security lighting. Easy installation and maintenance with colour temperature and voltage options



Power Selectable  
 80W / 100W / 120W

Colour Selectable  
 3000K / 4000K / 5000K

120-347V  
 Universal Driver  
 0-10V dimming



Motion Sensor  
 Compatible  
 sold separately

Borosilicate Glass  
 Lens

Built-in Photocell  
 unplug to bypass

Optional  
 Wire Guard  
 and Visor  
 sold separately

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Efficacy	139.7 lm/W
CCT	3000K/4000K/5000K
CRI	82
Distribution	105°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	120W   4000K Photocell ON

LUMEN OUTPUT			
	3000K	4000K	5000K
80W	12097 lm	12581 lm	12177 lm
100W	14771 lm	15831 lm	15486 lm
120W	17193 lm	17966 lm	17508 lm


### APPROVALS & LISTINGS

cUL	E482965
DLC Premium	S-SXRYRC

### DIMENSIONS AND WEIGHTS

Fixture Weight	7.5 lbs
Fixture Dimensions	14.2 x 8.6 x 6.5 in
Carton Qty	1
Carton Weight	9.9 lbs
Carton Dimensions	16.1 x 11.4 x 9.4 in

### DIMENSIONAL DRAWINGS (IN)

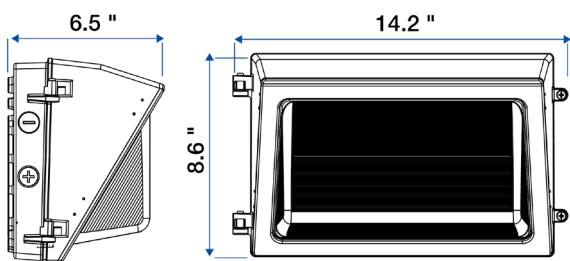

### ELECTRICAL

Wattage	80W/100W/120W
Voltage	120-347V
Current	1.2A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Borosilicate Glass
Finish	Powder Coated
Finish Colour	Bronze
IP Rating	IP65

### ACCESSORIES (Sold Separately)

Wire Guard	CWP05-WG
Visor	CWP05-VISOR
Motion Sensor	HB01DMS-C
Motion Sensor Remote	MS04-RC

**NOTE: MS04-RC is required** for the Motion Sensor to function

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | [orders@csc-led.com](mailto:orders@csc-led.com) | (519) 880 - 9833