

CWP05 Wall Pack

45W/60W/80W | 3CCT | 120-347V



Meet the successor to our best-selling CWP04 Wall Packs!
 Ideal for entryway and exterior security lighting. Easy installation and maintenance with colour temperature and voltage options



Power Selectable
 45W / 60W / 80W

Colour Selectable
 3000K / 4000K / 5000K

**120-347V
 Universal Driver**
 0-10V dimming



**Motion Sensor
 Compatible**
 sold separately

**Borosilicate
 Glass Lens**

Built-in Photocell
 unplug to bypass

**Optional
 Wire Guard
 and Visor**
 sold separately

TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	134.8 lm/W
CCT	3000K/4000K/5000K
CRI	80
Distribution	105°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	80W 4000K Photocell ON

LUMEN OUTPUT			
	3000K	4000K	5000K
45W	7027 lm	7324 lm	7460 lm
60W	9027 lm	9496 lm	9606 lm
80W	11385 lm	12077 lm	11584 lm


APPROVALS & LISTINGS

cUL	E482965
DLC Premium	S-L71Z8W

DIMENSIONS AND WEIGHTS

Fixture Weight	7.5 lbs
Fixture Dimensions	14.2 x 8.6 x 6.5 in
Carton Qty	1
Carton Weight	9.9 lbs
Carton Dimensions	16.1 x 11.4 x 9.4 in

DIMENSIONAL DRAWINGS (IN)

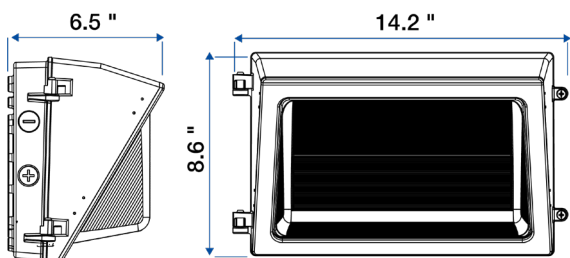

ELECTRICAL

Wattage	45W/60W/80W
Voltage	120-347V
Current	0.8A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Borosilicate Glass
Finish	Powder Coated
Finish Colour	Bronze
IP Rating	IP65

ACCESSORIES (Sold Separately)

Wire Guard	CWP05-WG
Visor	CWP05-VISOR
Motion Sensor	HB01DMS-C
Motion Sensor Remote	MS04-RC

NOTE: MS04-RC is required for the Motion Sensor to function

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833