

# Pole Top Area Light

150W | Colour Selectable | 120-347V



Elegant look and design  
Ideal for parking lots, pathways, parks, retail settings, and more

Colour Selectable  
3000K / 4000K / 5000K

Complete with  
Photocell Receptacle  
and Shorting Cap  
Photocells sold separately

0-10V Dimmable

High Efficiency Optics  
with type 5 distribution

Polyester  
Powder-Coat Finish  
(Bronze)

Fits Up To 2<sup>3</sup>/<sub>4</sub>" OD pole

Instant Start



Optional Accessories (sold separately)  
120-347V Photocell (JL-207E), 120-277V Photocell (JL-205LV)



JL-207E



JL-205LV

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	18,747 lm @ 3000K
Efficacy	123 lm/W
CCT	3000K / 4000K / 5000K
CRI	>80
Distribution	Type V
Beam Angle	90°
Dimmable	0-10V
L70 Life	>50,000 hours
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLK0DL289PAI

### ISOCANDELA PLOT

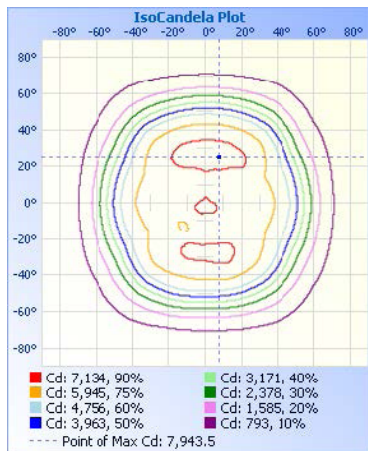

### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	26.1 fc	43.0 ft	33.3 ft
34.0ft	6.54 fc	86.0 ft	66.6 ft
51.0ft	2.90 fc	128.9 ft	100.0 ft
68.0ft	1.63 fc	171.9 ft	133.3 ft
85.0ft	1.05 fc	214.9 ft	166.6 ft
102.0ft	0.73 fc	257.9 ft	199.9 ft

■ Vert. Spread: 103.3°  
■ Horiz. Spread: 88.8°

### ELECTRICAL

Wattage	150W
Voltage	120-347V
Surge Protection	4kV
Power Factor	>0.9
THD	<20%
Operating temp	-40 to 45°C

### CONSTRUCTION

Power Cord	74"
Housing	Aluminum
Finish	Powder coated
Colour	Bronze
IP Rating	IP65
Weight	14.33 lbs
Carton qty	1

### ACCESSORIES (SOLD SEPARATELY)

120-347V Photocell	JL-207E
120-277V Photocell	JL-205LV

### DIMENSIONS

