

ST2B Linear Strip Light

20W | Colour Selectable | 120-347V | 2 ft

Ideal for shops, cove lighting, and general area lighting.
Toolless entry for ease of installation

Designed for a Quick
and Easy Installation

open and closes without the use of tools



Light Engine Drops
on Aircraft Cables
for ease of installation

Internal Dimming

Low Glare
Frosted Lens

Colour Selectable
3500K / 4000K / 5000K

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens*	2,638 lm
Efficacy*	137.8 lm/W
CCT	3500K/4000K/5000K
CRI	85
Beam Angle	120°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year
Factory Settings	20W 4000K

*Shown at 3500K

LUMEN OUTPUT			
	3500K	4000K	5000K
20W	2805 lm	2903 lm	2846 lm

APPROVALS & LISTINGS

cUL	E482965
DLC	S-L4CFW3, S-MJE0AV

ACCESSORIES (SOLD SEPARATELY)

Suspension Kit	ST-SUS-KIT
Connection Bracket	ST-CONN-BKT
Microwave Motion Sensor (12 ft max)	MS02-MW-HW-DC
Microwave Motion Sensor (25 ft max)	MS03-MW-HW-DC
Motion Sensor Remote Control	MS02-RC
Wire Guard	ST-WG-SM

ELECTRICAL

Wattage	20W
Voltage	120-347V
Current	0.56A
Surge Protection	2kV
Auxiliary Output	12V
Power Factor	0.93
THD	14.4%
Operating Temp	-20°C to 45°C


CONSTRUCTION

Housing	Colour Coated Steel Plate
Lens	Polycarbonate
Finish Colour	White
IP Rating	IP20 (Damp Location)

DIMENSIONS & WEIGHTS

Product Dimensions	23.97 x 2.95 x 3.26 in
Fixture Weight	1.75 lbs
Carton Qty	1
Carton Gross Weight	2.07 lbs
Carton Dimensions	24.4 x 3.2 x 3.5 in
Master Carton Qty	8
Master Carton Gross Weight	16.51 lbs
Master Carton Dimensions	25 x 13.8 x 7.9 in

ILLUMINANCE AT A DISTANCE

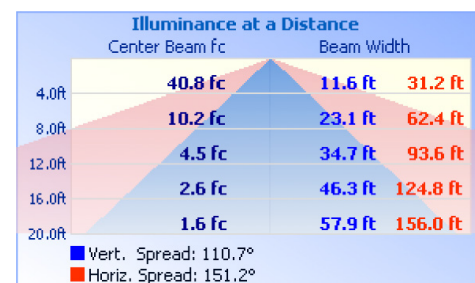

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833