

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



One Piece Gear Tray
for quick access to driver
and accessories

Stainless Steel
Spring Clips



Colour Selectable
3500K / 4000K / 5000K



120-347V Driver

Polycarbonate
Low Glare Lens

Power Selectable
30W / 45W / 60W



1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

TECHNICAL DATA



LIGHT SPECIFICATIONS


Lumens	7,800 lm
Efficacy	130 lm/W
CCT	3500K / 4000K / 5000K
CRI	84
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year
Factory Settings	60W 5000K

APPROVALS AND LISTINGS

ETL	5001780
DLC	S-ZA1MJ8, S-RHP140, S-HG5A9L

LUMEN OUTPUT			
	3500K	4000K	5000K
30W	4425 lm	4550 lm	4520 lm
45W	6378 lm	6585 lm	6529 lm
60W	7947 lm	8333 lm	8190 lm

ILLUMINANCE AT A DISTANCE

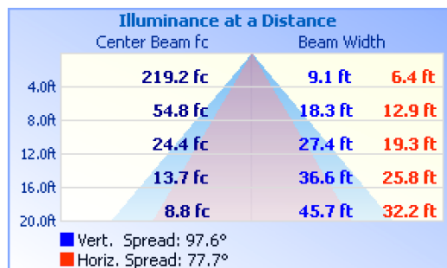

ELECTRICAL

Wattage	30W / 45W / 60W
Voltage	120-347V
Current	0.75A
Power Factor	0.96
THD	15.8%
Operating Temp	-40°C to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66

DIMENSIONS AND WEIGHTS

Fixture Weight	5.1 lbs
Fixture Dimensions	46.5 x 4.2 x 3.3 in
Master Carton Qty	4
Master Carton Gross Weight	25.6 lbs
Master Carton Dimensions	47.5 x 9.6 x 8.4 in
Carton Qty	1
Carton Gross Weight	5.8 lbs
Carton Dimensions	46.8 x 4.7 x 3.6 in

DIMENSIONAL DRAWING (IN)

