

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



Stainless Steel Spring Clips

One Piece Gear Tray for quick access to driver and accessories

Colour Selectable
3500K / 4000K / 5000K

120-347V Driver

Polycarbonate Low Glare Lens

Power Selectable
65W / 75W / 90W / 110W

1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

TECHNICAL DATA



LIGHT SPECIFICATIONS


| | |
|------------------|-----------------------|
| Lumens | 15,400 lm |
| Efficacy | 140 lm/W |
| CCT | 3500K / 4000K / 5000K |
| CRI | 83 |
| Dimmable | 0-10V |
| Life | 50,000 hrs |
| Warranty | 5-year |
| Factory Settings | 110W 5000K |

APPROVALS AND LISTINGS

| | |
|-----|--------------------|
| ETL | 5001780 |
| DLC | S-PUF6XT, S-9VC8KG |

| LUMEN OUTPUT | | | |
|--------------|-----------|----------|----------|
| | 3500K | 4000K | 5000K |
| 65W | 9699.2 lm | 10025 lm | 9818 lm |
| 75W | 11048 lm | 11427 lm | 11188 lm |
| 90W | 12856 lm | 13333 lm | 13047 lm |
| 110W | 15346 lm | 15881 lm | 15508 lm |

ILLUMINANCE AT A DISTANCE

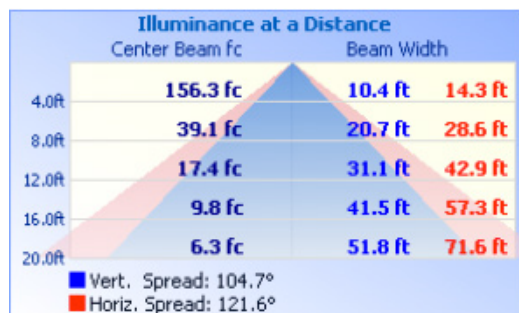

ELECTRICAL

| | |
|------------------|------------------------|
| Wattage | 65W / 75W / 90W / 110W |
| Voltage | 120-347V |
| Current | 0.55A |
| Surge Protection | 2kV |
| Auxiliary | 12V |
| Power Factor | 0.95 |
| THD | 9.5% |
| Operating Temp | -40°C to 40°C |

CONSTRUCTION

| | |
|-----------|---------------|
| Housing | Polycarbonate |
| Finish | White/Grey |
| Length | 8 ft |
| IP Rating | IP66 |

DIMENSIONS AND WEIGHTS

| | |
|---------------------|-------------------|
| Fixture Weight | 10.5 lbs |
| Fixture Dimensions | 92 x 3.3 x 4.3 in |
| Carton Qty | 1 |
| Carton Gross Weight | 12.3 lbs |
| Carton Dimensions | 94 x 4 x 4.7 in |

DIMENSIONAL DRAWING (IN)

