

WR2 Wrap Fixture

24W-35W | CCT Tunable | 120-347V



Our most versatile wrap fixture that meets or exceeds all commercial specifications

True universal driver input (120-347V) and colour tunable

Elegant Wraparound Lens

delivers low glare and even illumination with wide throw



2 DIP Switches

for easy selection of colour temperature and wattage

Compact 0-10V Dimmable Driver with 120-347V Input

Dimmable motion sensor option available (sold separately)

Surface or Pendant Mount Ready



2 Piece Design

with separate light engine and base, connected by aircraft cable, allows for fast and easy installation



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	5,100 lm @ 35W
Efficacy	145.71 lm/W
CCT	3500K / 4000K / 5000K
CRI	80
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

cETL	5001780
DLC	PLEUIAYAFWKP, S-VB00VT

ILLUMINANCE AT A DISTANCE

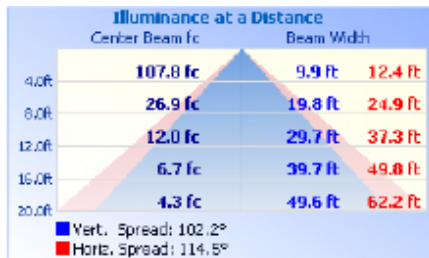

ISOCANDELA PLOT

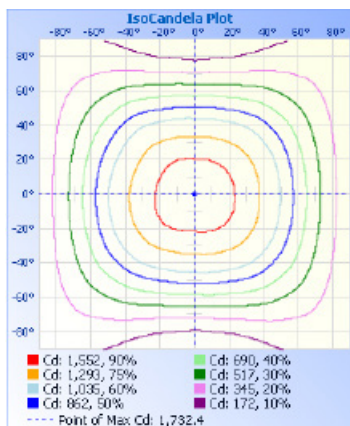

ELECTRICAL

Wattage	24W / 27W / 30W / 35W
Voltage	120-347V
Power Factor	>0.9
THD	15%
Operating Temp	-20 to 40°C

CONSTRUCTION


Housing	Steel
Mounting	Surface or Pendant
Finish	White
IP Rating	IP20
Product Dimensions	1220 x 132 x 71.9 mm
Net Weight	10.4 kg
Gross Weight	11.8 kg
Carton Qty	4
Carton Dimensions	1245 x 295 x 175 mm

ACCESSORIES (SOLD SEPARATELY)

STVT-IMS	Dimmable Motion Sensor
ST4-CABLE	Aircraft Cable



DIMENSIONAL DRAWING

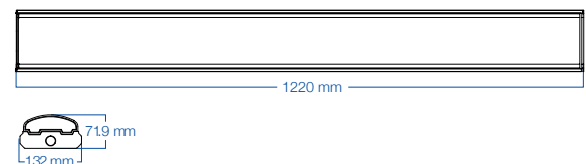

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com